




Zebra® Sidewinder® Tube Skimmer

Introducing the Next Generation

New Features of Generation 8


- Improved gear drive technology
- Longer tube life
- Compact design
- Motor and mounting options
- Skims underneath conveyors, enclosed sumps, and hard-to-access areas
- Pick the reach you need: sizes available from 8" up to 95"
- Installs in seconds
- Industrial-grade pick-up tubing uses ceramic scraper
- Large oil discharge port
- 1 quart per hour oil removal capacity
- Only 1/2x3" (13x76mm) sump access needed!
- Maximum temperature 90°F (30°C)
- Continuous-duty motor
- Two year warranty
- The Sideways™ Skimmer

Accessories and Options

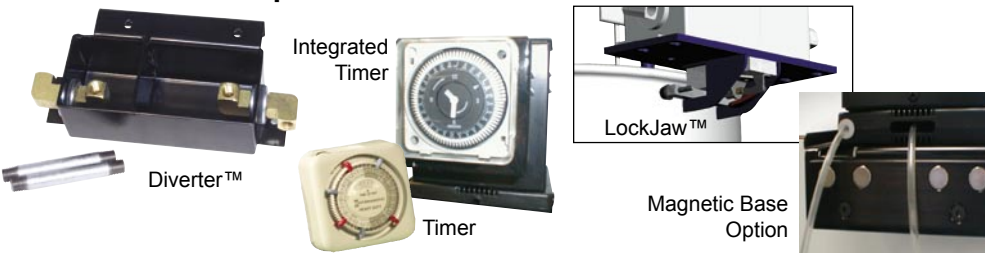

Model	Part Number	Description*	Notations
Sidewinder	ZVA8-08 ZVA8-08E ZVA8.2-08	Sidewinder Tube skimmer with 8" reach Sidewinder Tube skimmer with 8" reach Sidewinder Tube skimmer with 8" reach	100-120v, 60Hz, 28 rpm 208/220/240v, 50Hz, 23/28 rpm 110v, 60Hz, 7 rpm
Magnetic Base Option	ZXB8-Mag	Magnetic base option for Sidewinder without Diverter	
Diverter	BGST4	Oil/coolant separator for Sidewinder and Belt skimmers	Will raise unit 2.5", please account for this when determining required reach.
LockJaw	BGX2	Lockjaw mounting clamp for Sidewinder with Diverter only	Great for skimmer portability and for drum use.
Timer	XETIMER XETIMER-GSBZ	Timer for mechanical skimmers 24 hour, 3 setting 120v, 60Hz, 7 day, 2 hour interval settings.	External, plug-in type Integrated with motor

*Longer reach sizes available, in 3" increments, to 95" max. Please change suffix.

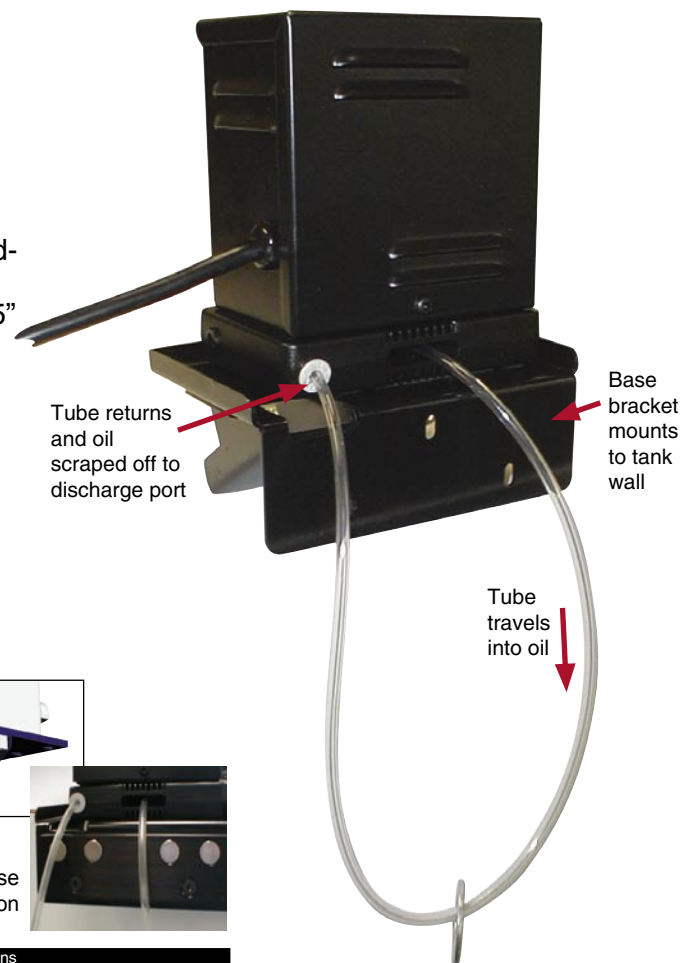

To determine the reach required, measure the distance from the mounting point to the lowest operating fluid level. Reach sizes available in 3" increments, to maximum reach of 95". Please specify by changing suffix.

Zebra Skimmers Corporation
 PO Box 833 Chagrin Falls, OH 44022
www.ZebraSkimmers.com
www.CoolantMaintenance.com
 Toll Free 888-249-4855
 Phone: 440.349.0141
 Fax: 440.349.1211

© April 2009 Zebra Skimmers Corp. All rights reserved.

Contact your distributor
for more information