

Tube skimmer tube replacement instructions

1. Open the three screws at bottom of the skimmer



2. Remove the bottom plate and the cartridge from the complete skimmer assembly. Notice the washers between the bottom plate and the cartridge.



3. Remove the four screws from the cartridge and separate cartridge halves.




4. Remove the old tube and replace it with new one.


Notice! Raised writing in the scraper should be facing away from cartridge.



Make sure that dots are above

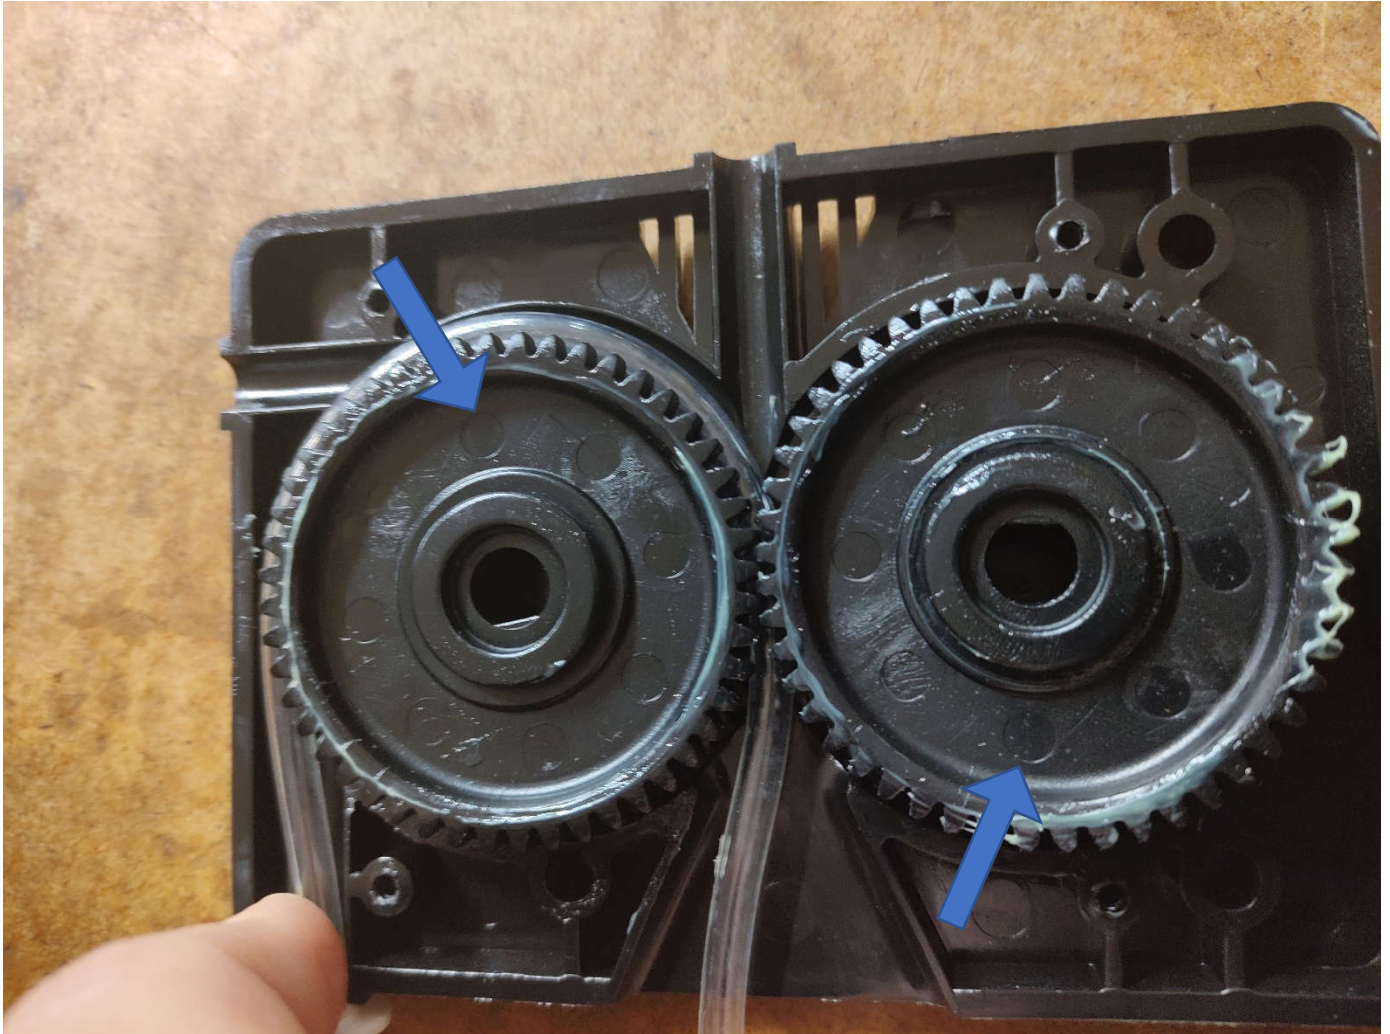

5. Close the cartridge and make sure that the tube will not crush between cartridge halves. Test operability by pulling the tube while pressing cartridge halves together.

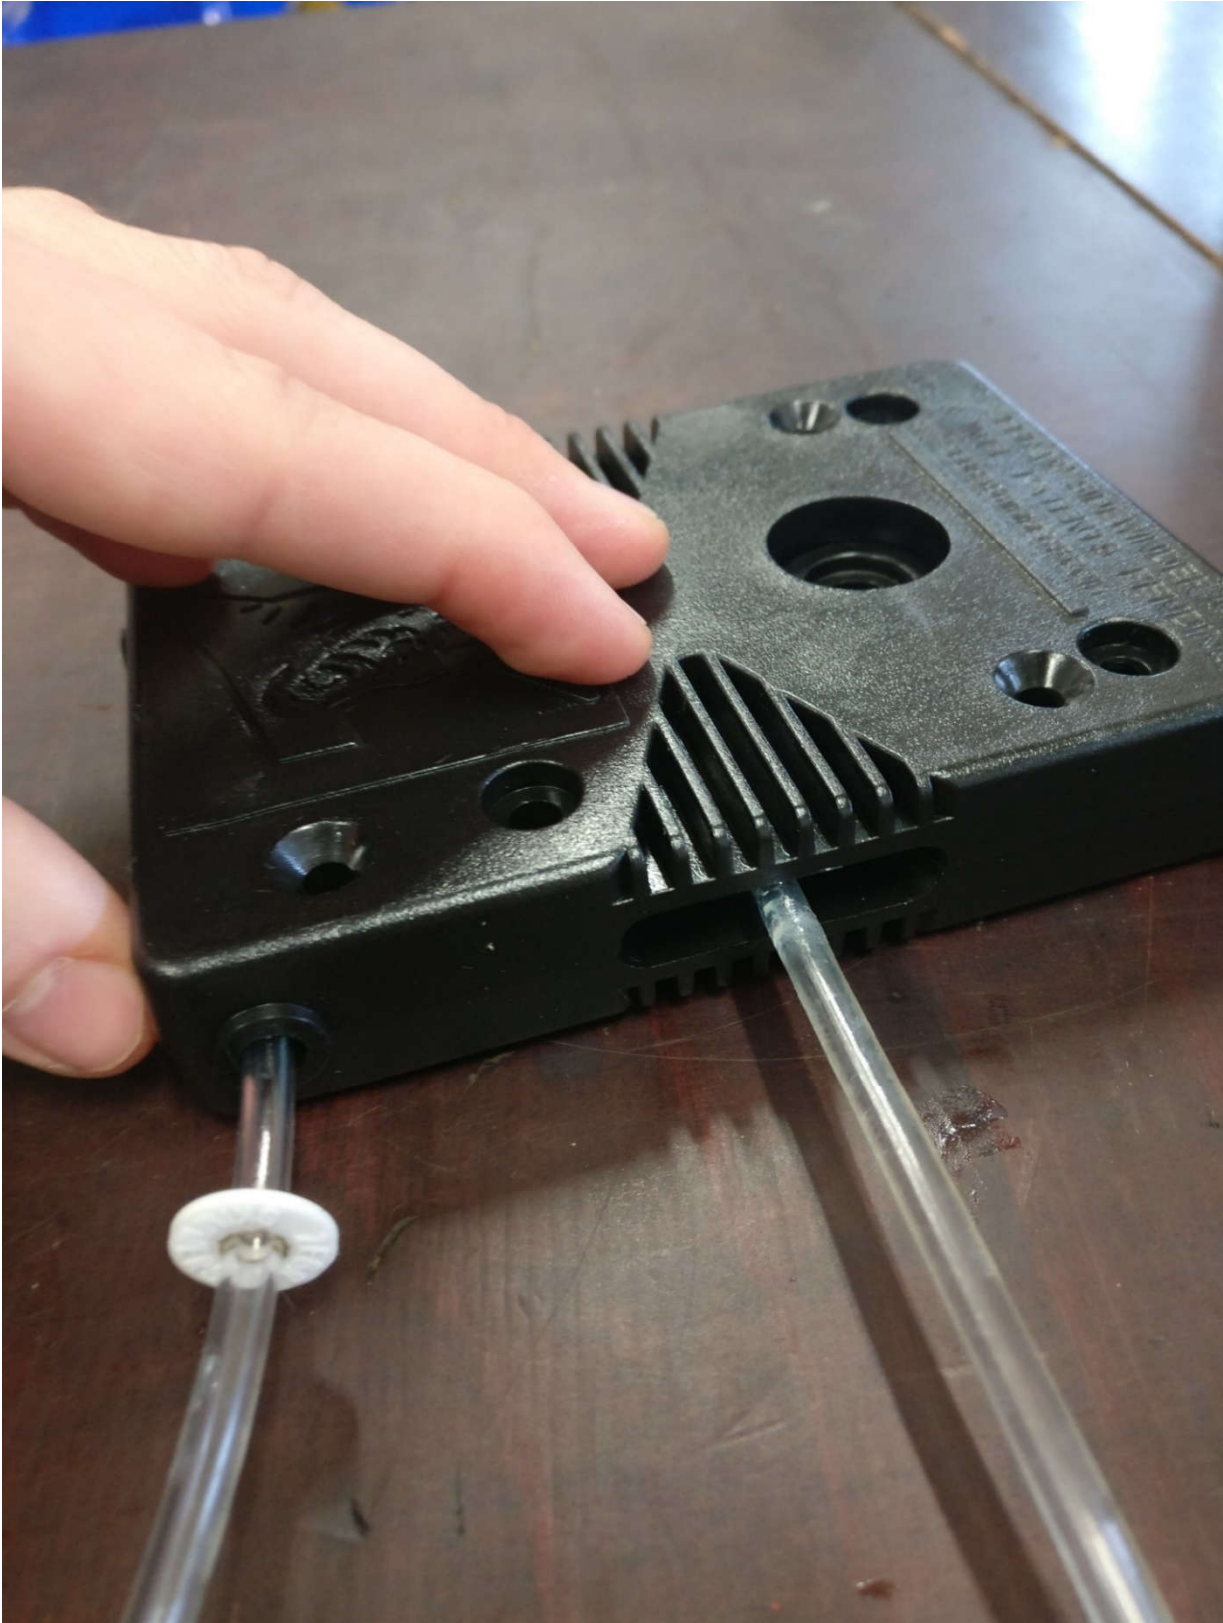

6. Fasten screws from cartridge.



7. Assemble cartridge to the axle and twist it to correct position.



8. Do not forget the washers!



9. Assemble the cartridge and the bottom plate with the three screws.

